
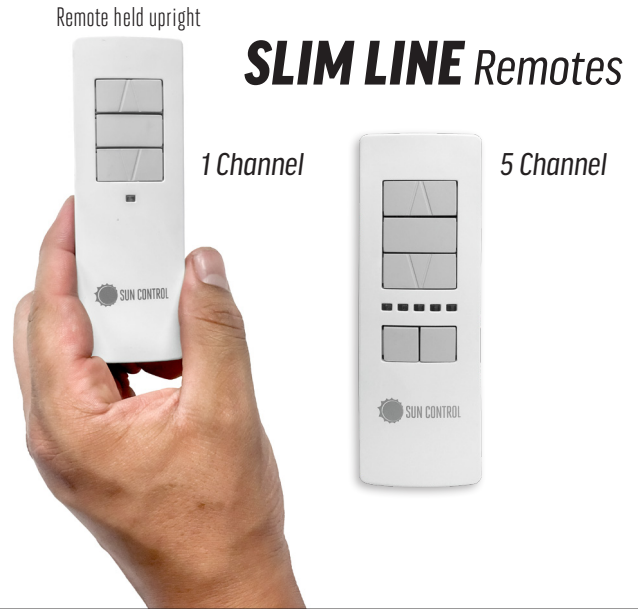


LIMIT SETTINGS QUICK GUIDE

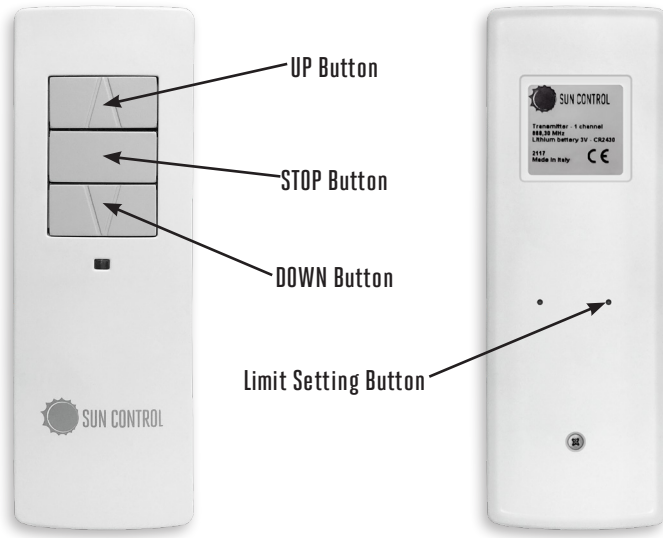

LIMIT SETTING

! ALWAYS SET THE TOP LIMIT FIRST

! Ensure the remote is held upright before entering limit programming mode.

1 Using a paper clip, push the **LIMIT SETTING** button until the motor makes a brief movement (jogs) in both directions to enter limit programming mode.

Red light will briefly flash

2 **Set top limit:** Press and hold the **UP** button and run the motor to desired top position.

! Shade will only move when button is pushed.

Red light will briefly flash when **UP** button is first pushed.

3 Set bottom limit: Press and hold the **DOWN** button and run the motor to desired bottom position.

! Shade will only move when button is pushed.

Red light will briefly flash when **UP** button is first pushed.

When shade is in the desired position, press and hold the **STOP** button to set the top limit position. The motor will make a brief movement (jogs) in both directions

Red light will briefly flash when **UP** button is first pushed.

TOP LIMIT IS NOW SET.

When shade is in the desired position, press and hold the **STOP** button to set the bottom limit position. The motor will make a brief movement (jogs) in both directions

Red light will briefly flash when **UP** button is first pushed.

BOTTOM LIMIT IS NOW SET.

! Remote is no longer in LIMIT PROGRAMMING MODE

Limits are now set. When the **UP** button is pushed, shade will raise to the set upper limit and when the **DOWN** button is pushed, the shade will lower to the bottom set limit. Press **STOP** button at any time to stop the shade from moving in either direction.

! Limit setting instructions are for 1 channel premium remotes. To set limit settings for 5 channel remotes, first ensure you are on the correct channel then follow the instructions to set limit settings.